



1. List of Components


- Cog Clock Face
- Clock Mechanism
- Rubber washer
- Metal Washer
- Metal Nut
- Hour Hand (shortest one)
- Minute Hand (longer one)
- Second Hand (red hand)

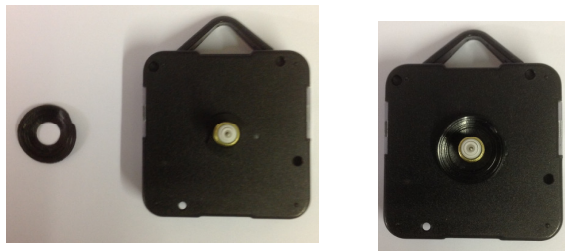


2. Place rubber washer over the spindle on the clock mechanism

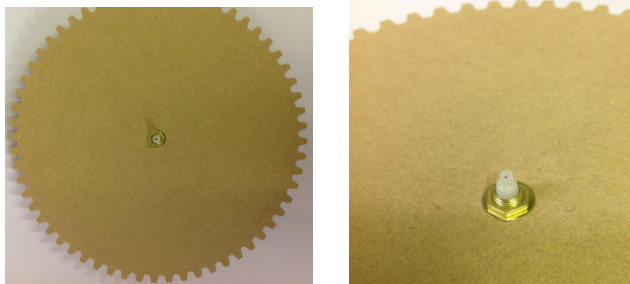


3. Place the clock face and the metal washer over the clock spindle and secure with the metal nut.

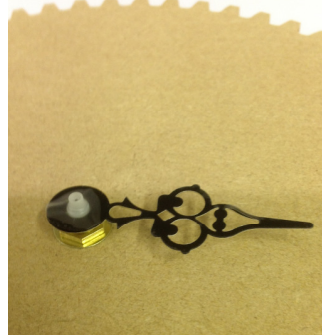


4. Push the hour hand onto the outer plastic spindle, black side up. Note the clock hands are quite flexible and can bend easily. Remove any protective plastic film on the hand after inserting.

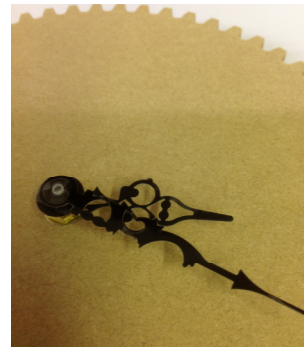

5. Push the minute hand onto the inner plastic spindle, black side up. Note the clock hands are quite flexible and can bend easily. Remove any protective plastic film on the hand after inserting.

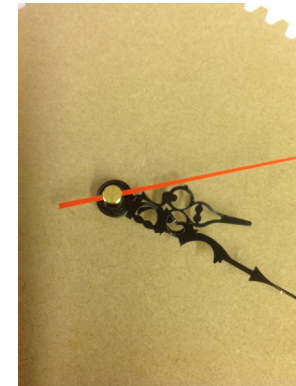

6. Push the second hand into the centre of the plastic spindle. Note the clock hands are quite flexible and can bend easily.

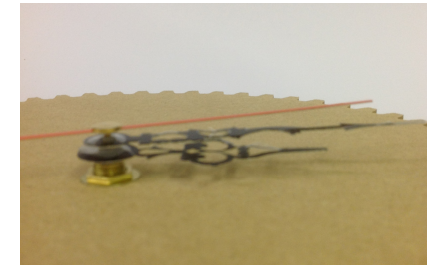

7. Ensure there is adequate clearance on the hands so they do not catch on each other.



8. Turning the clock over insert an AA battery (not supplied) into the battery compartment, ensuring it is the right way round. Note if you intend to hang the clock ensure the hanging hook is pointing up towards 12 on the clock.